TOSHIBA

p75

2,300 ANSI-lumens
Contrast 2,000 : 1
DDR DMD™-technology

A perfect combination: brightness and mobility

- ECO mode reduces the operating noise and expands the service life of lamp
- Very bright with just 1.9 kg weight

TOSHIBA

p75

the world of business projectors

Display 0.7" DDR DMD™* Chip
Resolution XGA 1,024 x 768
Brightness 2,300 ANSI-lumens
Colour reproduction 16.7 mio. colours
Contrast 2,000 : 1
Projection format 4 : 3 switchable to 16 : 9
Lamp 200 W (TLPLW7LAMP)
Max. lamp life up to max. 2,000 hours / up to max. 3,000 hours in ECO mode
Lens F = 2.4 - 2.6 / f = 24.0 - 29.1 mm, manual zoom
Zoom ratio 1.2 x
Frequencies (hor. / vert.) 15.6 - 68.7 kHz / 48 - 85 Hz
Projection front, rear and ceiling
Digital keystone correction vertical + / - 15°
Picture size (diagonal) 0.76 m - 7.60 m
Projection distance 1.0 m - 10.0 m
Input signal NTSC / PAL / SECAM, HDTV & DTV, 480i, 480p, 576i, 576p, 720p, 1,080i, DVD, VGA / SVGA / XGA / SXGA (comp.)
Inputs 1 x RGB (D-sub 15), 2 x video (RCA, S-video), audio (stereo mini jack), USB (for remote mouse)
Outputs RGB (D-sub 15), audio (stereo mini jack)
Serial interface -
Power supply AC 100 - 240 V, 50 / 60 Hz
Loudspeaker integrated
Dimensions (W x H x D) 245 x 86 x 183 mm
Weight 1.9 kg
Specials ECO mode
Accessories remote control with laserpointer and batteries, owners manual (CD ROM), D-sub 15pin- and power cable, softcase
Options ceiling mounting, spare lamp, trolley, camera c001

high eco XGA

Projection distance (in meters)

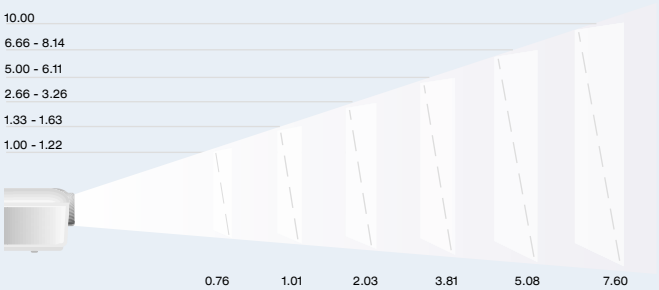

Picture size (diagonal in meters)

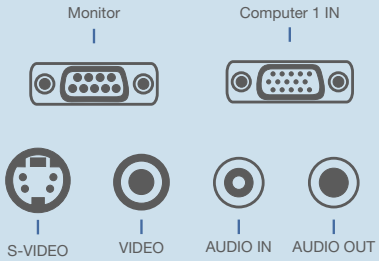

* DMD™ is registered trademark of Texas Instruments

August 2005 • Subject to modifications and errors

www.toshiba-europe.com/projectors

Toshiba Europe GmbH
Projection & Display Technology
Phone: ++49-2131-158-01 · Fax: ++49-2131-158-835
e-mail: projektoreninfo@toshiba-teg.com